

Tough Jobs Soft Ride

PREMIUM OTR SOLID TIRE

BRAWLER HPS
SOFT RIDE



Protecting people protecting assets

Brawler HPS Soft Ride tires are designed to perform in tough recycling and waste management applications while providing the most comfortable ride within the Trelleborg Brawler range.


The Soft Ride compound combined with Brawler's unique elliptical sidewall apertures delivers higher shock absorption and reduced vibration ensuring the best possible protection for operators and machines.

Designed with the demands of recycling and waste management operations in mind Brawler HPS Soft Ride delivers the toughness of a traditional solid tire and a ride comfort equivalent to a filled pneumatic tire.

DELIVERING THE HIGHEST LEVELS OF COMFORT AND DURABILITY FROM A SOLID TIRE


VIBRATION & COMFORT – DYNAMIC TEST

Tested to ISO 5008

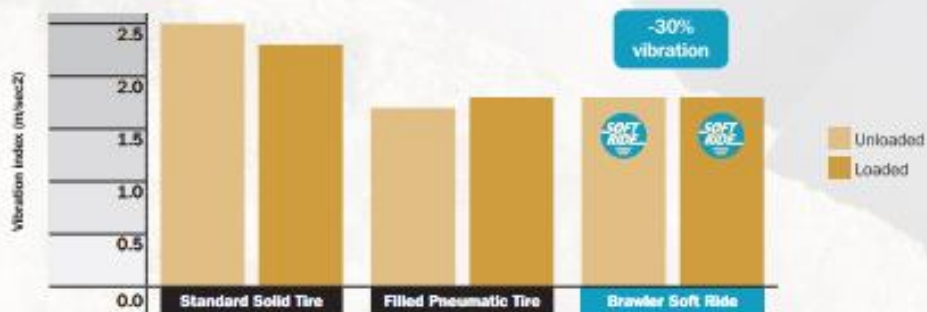

DEFLECTION – STATIC TEST

Deformation (mm) under variable load

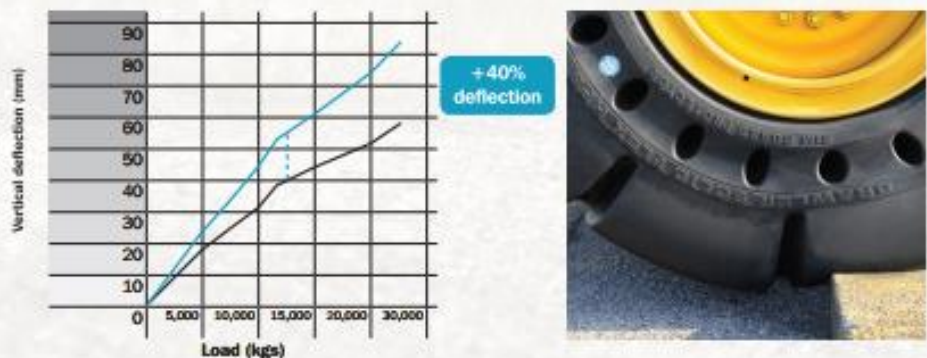

Brawler HPS Soft Ride



ANTI VIBRATION CONSTRUCTION

Enhanced driver comfort



CUT RESISTANT COMPOUND

Damage protection



ELLIPTICAL APERTURES

Increased deflection



ULTRA DEEP TREAD

Extended service life

WHY CHOOSE SOFT RIDE?



MAXIMUM VALUE

Reduced operating cost per hour



MAXIMUM UPTIME

Increased productivity, maintenance free



INCREASED SAFETY

Reduced driver exposure to vibration



REDUCED IMPACT

Protecting people, protecting assets

PREMIUM OTR SOLID TIRE

BRAWLER HPS SOFT RIDE



HPS Solidflex
Traction

HPS Solidflex
Smooth

HPS SOLIDFLEX TRACTION

Tire Size	Alternative Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Tread Depth [mm]	Load Capacity 10 km/h [kg]
17.5-25	445/80-25	14.0-25	1340	446	155	8805
20.5-25	525/80-25	17.0-25	1495	527	188	12155
23.5-25	605/80-25	19.5-25	1630	606	216	15320
26.5-25	685/80-25	22.0-25	1715	718	236	18295
29.5-25		25.0-25	1845	761	264	22540

HPS SOLIDFLEX SMOOTH

Tire Size	Alternative Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Tread Depth [mm]	Load Capacity 10 km/h [kg]
17.5-25	445/80-25	14.0-25	1340	446	155	8805
20.5-25	525/80-25	17.0-25	1495	527	188	12155
23.5-25	605/80-25	19.5-25	1630	606	216	15320
26.5-25	685/80-25	22.0-25	1715	718	236	18295
29.5-25		25.0-25	1845	761	264	22540

Notes: Tread depth on smooth tires indicates wearable rubber.
All Brawler™ HPS tires are available as either an assembly or as tire only.



WWW.TRELLEBORG.COM/WHEELS